



# 1998-2002 Honda Accord Tail Light Bulb Assemblies Replacement

Written By: Miroslav Djuric



# INTRODUCTION

PRE-REQ




## Step 1 — Tail Light Bulb Assemblies



- Open the trunk using your key in the trunk key slot or by using the lever under the driver's console.


## Step 2 — Panel Tail Lights

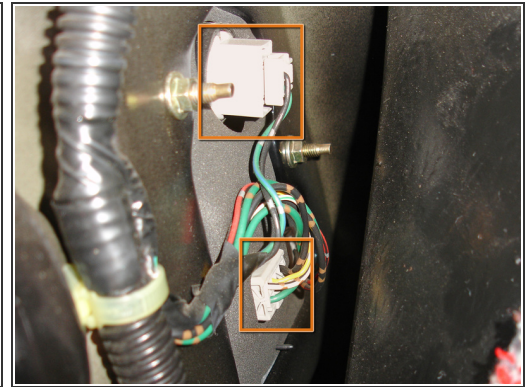

- Remove the small plastic screw along the vertical edge of the trunk entrance using a flathead screwdriver.
- Carefully peel back the trunk liner from around the edge of trunk opening by the light.
- Locate the two panel tail light connectors located between the liner and the panel tail light assembly.




### Step 3

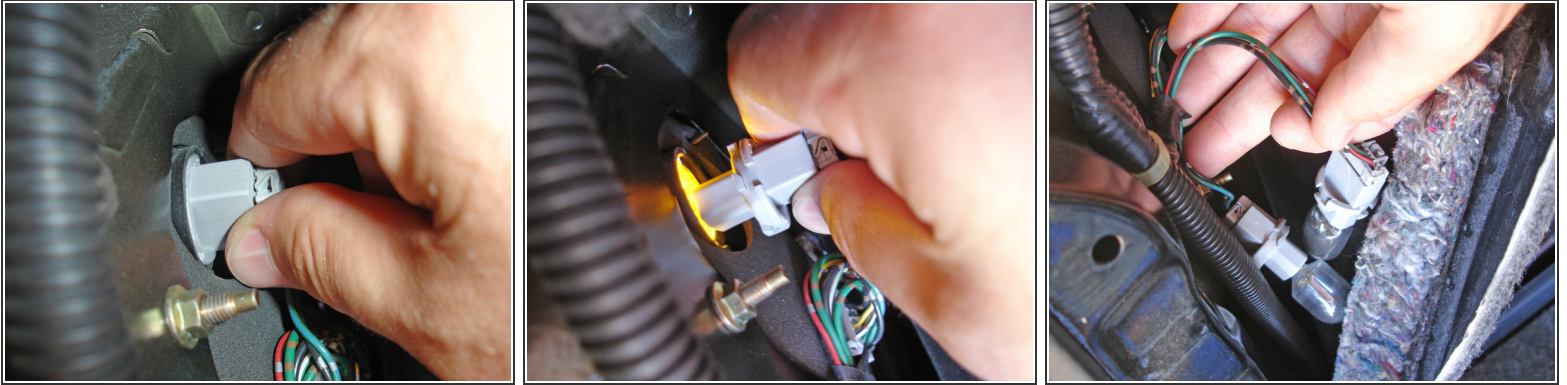

- Grab a light bulb socket and turn it counterclockwise until it can be removed from its hole.
- Repeat this process for the other light bulb socket.

### Step 4 — Trunk Lid Tail Lights

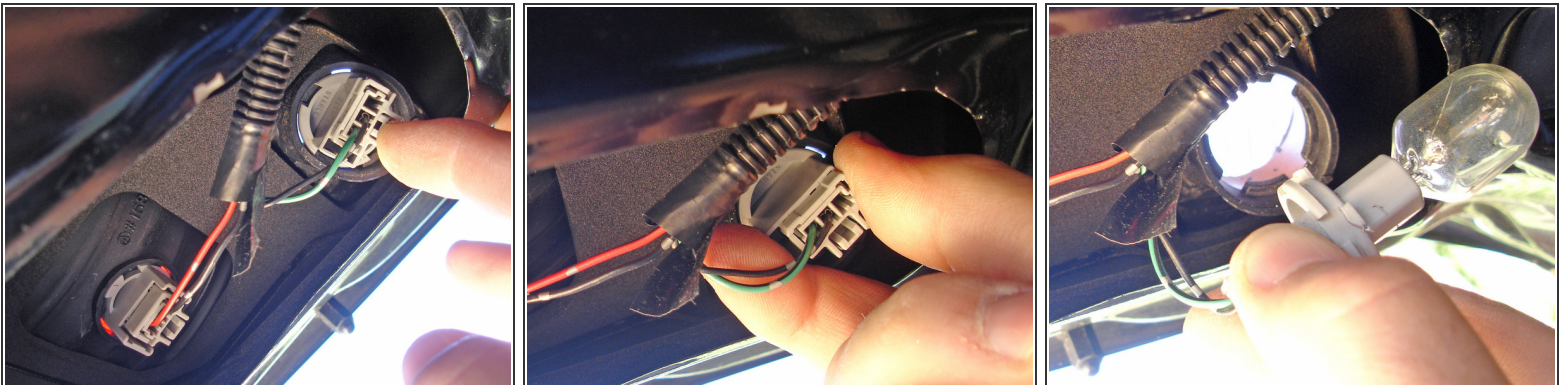

- Locate the light bulb sockets in the trunk lid, located on the back side of the trunk tail lights.
- Turn the light bulb sockets counterclockwise and remove them from their holes.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-09-16 05:46:18 AM.